

CHAPTER 37-02-02 MOUNTING AND USE

Section

37-02-02-01	Mounting
37-02-02-02	Use of Emblem

37-02-02-01. Mounting.

The emblem shall be mounted point up (see Figure 1) in a plane perpendicular to the direction of travel. It shall be placed centrally at the rear of the vehicle, unobscured, and two to six feet [1 to 1.83 meters] above the ground measured from the lower edge of the emblem. It may be permanently attached to equipment when practical. Portable emblems shall be mounted by using bracket sockets and identification emblem brackets specified in an American Society of Agricultural Engineers Standard, ASAE 5277, Mounting Brackets and Socket for Warning Lamp and Slow-Moving Vehicle (SMV) Identification Emblem.

General Authority: NDCC 39-21-50

Law Implemented: NDCC 39-21-50


37-02-02-02. Use of emblem.

The emblem shall not replace such warning devices as tail lamps, reflectors, flashing lights, or warning flags and is not to be used as a clearance marker for wide equipment.

General Authority: NDCC 39-21-50

Law Implemented: NDCC 39-21-50

Figure 1

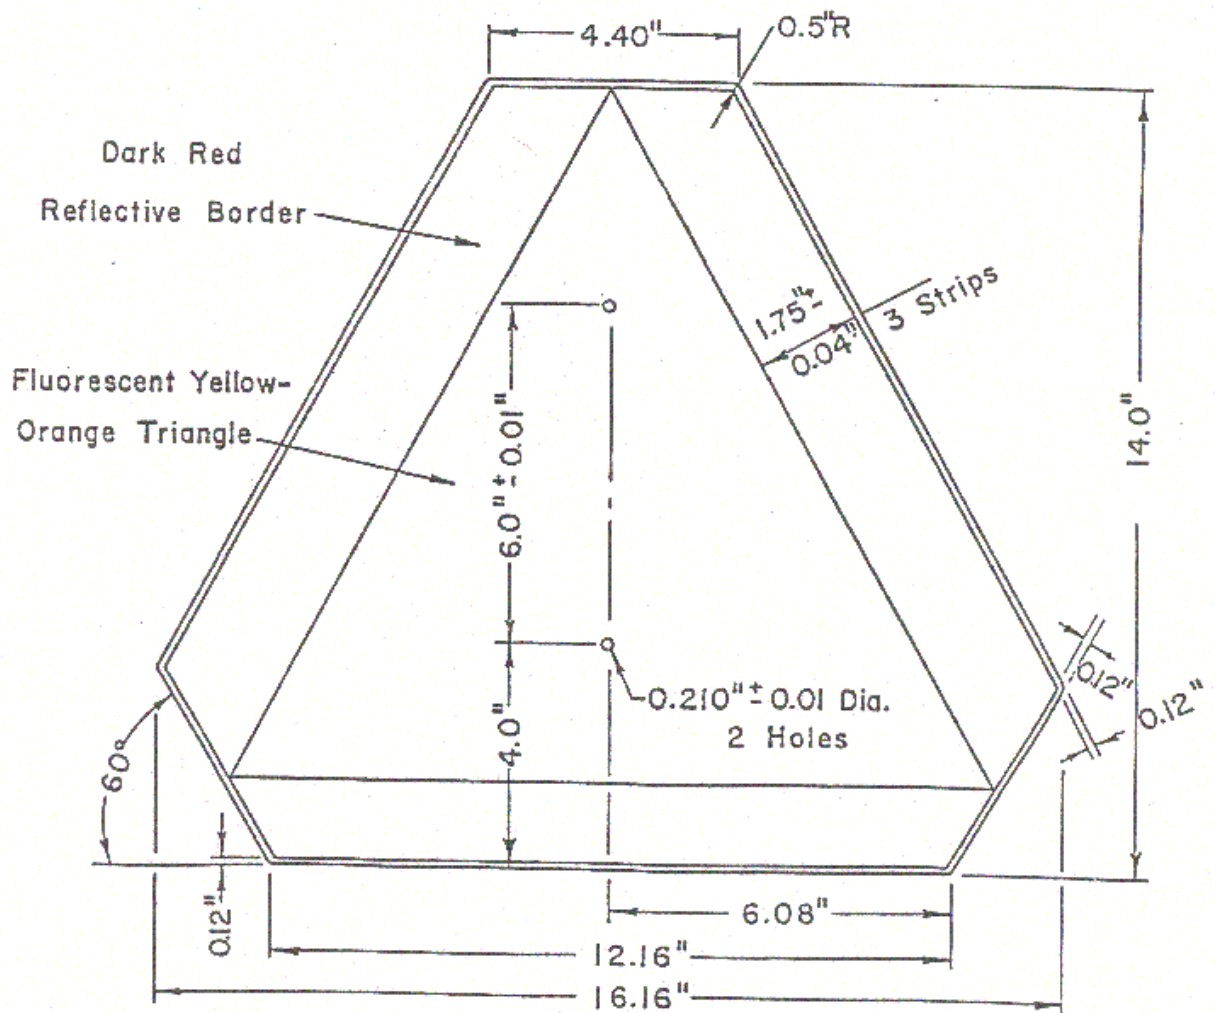

Unless otherwise specified a
tolerance of $\pm 0.06"$ applies
to all dimensions